


KODAK MAX Alkaline Battery K9V

Effective: 22/05/2014

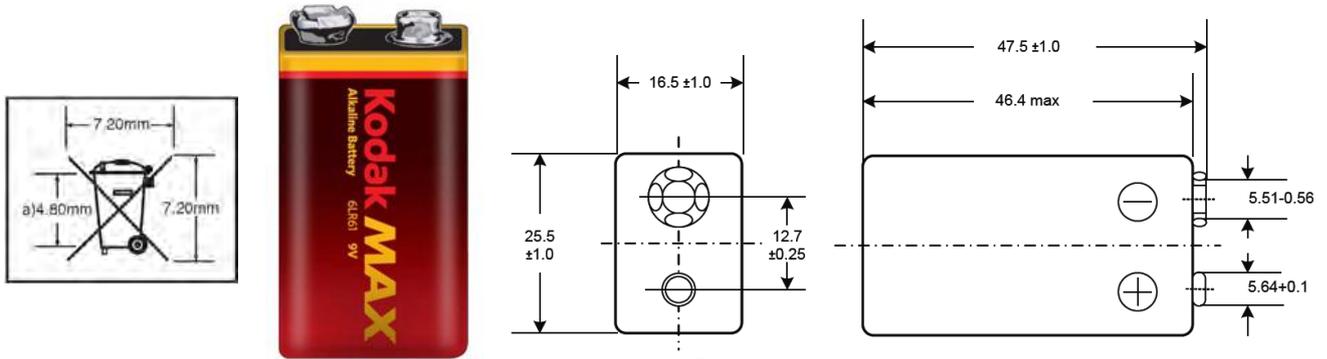

Dimensions are in millimeters and include label.

Chemical system:	Alkaline, MnO ₂ / KOH / Zn
Designations:	IEC 6LR61, ANSI 1604A
Nominal Voltage:	9.0 Volts
Nominal Capacity:	570 mAh at 620 Ohms to 4.8 Volts
Internal Impedance:	2.78 Ohms (typically)
Average Weight:	45 g
Average Volume:	21.8 cm ³
Recommended storage temperature:	10 – 25 °C
Operating temperatures:	-20 – 54 °C
Reaction:	$2 \text{ MnO}_2 + \text{ Zn } + \text{ H}_2\text{O} \rightarrow 2 \text{ MnOOH } + \text{ ZnO}$
Terminals:	Flat contacts, protruding negative
Jacket:	Plastic label

Note:

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead / 99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2006/66/EC, 2006/122/EC
- 6) Batteries are NOT subject to European RoHS regulations.
- 7) Primary Batteries (non-Rechargeable) are not subject to China RoHS regulations.
- 8) MSDS sheets are available on request from Strand Europe Ltd.