



Product Data Sheet

D-01-104-20

KODAK Xtralife Alkaline Battery KD





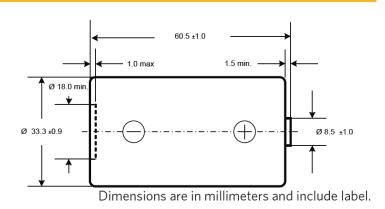

Effective: 05/06/2014

Chemical system: Alkaline, MnO2 / KOH / Zn

Designations: IEC LR20, ANSI 13A

Nominal Voltage: 1.5V

Nominal Capacity: 15500mAh at 39 Ohms to 0.8 Volts

Internal Impedance: 0.08 Ohms (typically)

Average Weight: 141.0 g

Average Volume: 53.8 cm³

Recommended storage temperature: 10-25 °C

Operating temperatures: -20 – 54 °C

Reaction: $2 \text{ MnO}_2 + \text{Zn} + \text{H}_2\text{O} \rightarrow 2 \text{ MnOOH} + \text{ZnO}$

Terminals: Flat contacts, protruding negative

Jacket: Plastic label

Note:

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead /99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2006/66/EC, 2006/122/EC
- 6) Batteries are NOT subject to European RoHS regulations.
- 7) Primary Batteries (non-Rechargeable) are not subject to China RoHS regulations.
- 8) MSDS sheets are available on request from Strand Europe Ltd.

